- ENERGY STAR® Qualified
- U.S. DOE Compliant for Water and Energy Standards
- ADA Compliant
- Ultra High Efficient With High Speed Extract and Low Water Consumption

MULTI-HOUSING

Micro Display

Front Load Washer

Rear Control

Speed Queen.

Prep for Card ("Y")

Prep for Coin ("X")

Coin ("C")

MADE WITH AMERICAN PRIDE

RELIABLE COMMERCIAL PRODUCTS

Large Door Opening With Heavy-Duty 10" (25.4 cm) Piano Hinge

Multi-Compartment Supply Dispenser

- Durable Stainless Steel Washtub
- High Speed Extract of 1000 RPM Spins Clothes Out Drier
- Energy Efficient Wash Cycles
- Door Swing 180°

MICRO DISPLAY FRONT LOAD WASHER SPECIFICATIONS

		SWRY71 WN	SFNCYRSP 111TW01	SFNCXRSP 111W02	SWRX71 WN	SFNBCRSP 111TW02	SFNCCRSP 111TW01	SFNCCRSP 111TW02	SWRT71 WN	SWRT73 WN
Activation		**Prep Card "Y"**	**Prep Card "Y"**	**Prep Coin "X"**	**Prep Coin "X"**	**Coin "C"**	**Coin "C"**	**Coin "C"**	**Coin "C"**	**Coin "C"**
Appearance										
Color - White		√	√	√	√	√	√	√	√	√
Control Panel Selection		**Rear**	**Rear**	**Rear**	**Rear**	**Rear**	**Rear**	**Rear**	**Rear**	**Rear**
Water and Energy Info										
Modified Energy Factor (MEF) - liters/kWh/cycle		2.16 (61.2)	2.24 (63.4)	2.24 (63.4)	2.16 (61.2)	2.16 (61.2)	2.24 (63.4)	2.24 (63.4)	2.16 (61.2)	2.16 (61.2)
Water Factor (WF) - liters/liter/cycle		5.2 (0.7)	4.5 (0.6)	4.5 (0.6)	5.2 (0.7)	5.2 (0.7)	4.5 (0.6)	4.5 (0.6)	5.2 (0.7)	5.2 (0.7)
Water Consumption - gal (liters per cycle)		14.8 (56.0)	12.8 (48.5)	12.8 (48.5)	14.8 (56.0)	14.8 (56.0)	12.8 (48.5)	12.8 (48.5)	14.8 (56.0)	14.8 (56.0)
Average Hot Water - gas (liters)		1.59 (6.0)	1.59 (6.0)	1.59 (6.0)	1.59 (6.0)	1.59 (6.0)	1.59 (6.0)	1.59 (6.0)	1.59 (6.0)	1.59 (6.0)
EcoWatersaver™			√	√			√	√		
Technical Info										
Weight - lb (kg)	250 (113)	√	√	√	√	√	√	√	√	√
Shipping Weight - lb (kg)	270 (123)	√	√	√	√	√	√	√	√	√
Electrical Requirements	120/60/1-15 amp	√	√	√	√	√	√	√	√	√
Overall Dimensions - WxDxH in (mm) 26 7/8" (683) x 28" (711) x 43" (1092)		√	√	√	√	√	√	√	√	√
Stainless Steel Basket Volume - cu. ft. (liters)	2.84 (80)	√	√	√	√	√	√	√	√	√
Cycle/Temp - Normal/Hot, Perm Press/Warm, Delicate/Cold		√	√	√	√	√	√	√	√	√
Motor	1 HP 750 W	√	√	√	√	√	√	√	√	√
Water Pressure psi (Bar) Pressure Fill 20 to 120 psi - 1.4/8.3		√	√	√	√	√	√	√	√	√
Spin Speeds - RPM	500, 650, 1000	√	√	√	√	√	√	√	√	√
High Capacity Meter Case - Ht 43 7/8" (1114)				√		√		√		
Drain		Pump	Pump	Pump	Pump	Pump	Pump	Pump	Pump	Gravity
Performance/Features										
Extra-Large Capacity		√	√	√	√	√	√	√	√	√
Freestanding Front Load Washer		√	√	√	√	√	√	√	√	√
Agency Approval	c^{UL}us	√	√	√	√	√	√	√	√	√

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO9001:2008.

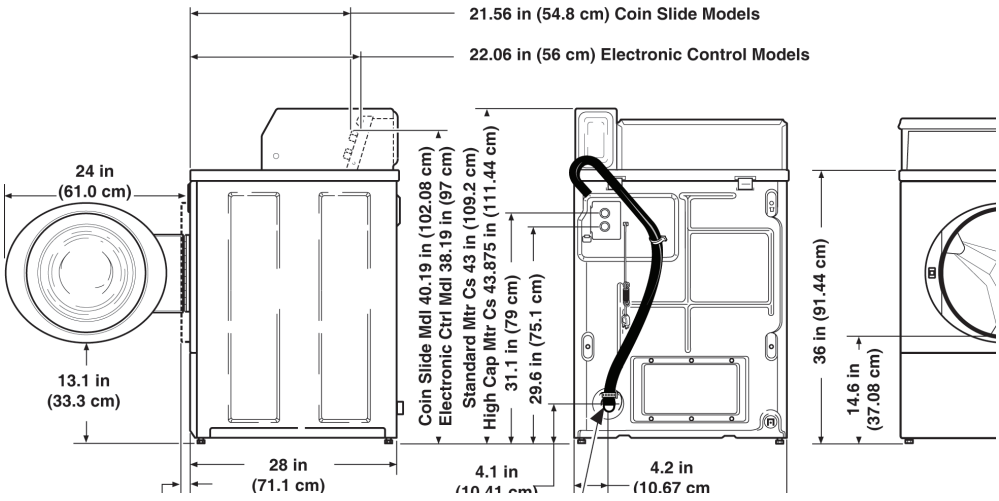
21.56 in (54.8 cm) Coin Slide Models
22.06 in (56 cm) Electronic Control Models
24 in (61.0 cm)
13.1 in (33.3 cm)
28 in (71.1 cm)
Coin Slide Mdl 40.19 in (102.08 cm)
Electronic Ctrl Mdl 38.19 in (97 cm)
Standard Mtr Cs 43 in (109.2 cm)
High Cap Mtr Cs 43.875 in (111.44 cm)
31.1 in (79 cm)
29.6 in (75.1 cm)
4.1 in
4.2 in (10.67 cm
36 in (91.44 cm)
14.6 in (37.08 cm)

MADE WITH AMERICAN PRIDE

Manufactured in Ripon, WI since 1908

Speed Queen.

© 2011 Alliance Laundry Systems LLC AM11-0344
Speed Queen | 800-345-3649 | www.speedqueen.com/route